

Pneumatic Tube & Special Tube

A GLOBAL COMPANY

AUSTRALIA

BELGIUM

BRAZIL

CHINA

DENMARK

FINLAND

FRANCE

GERMANY

INDIA

INDONESIA

ITALY

MALAYSIA

NETHERLANDS

POLAND

PORTUGAL

UNITED KINGDOM

CZECH REPUBLIC

ROMANIA

RUSSIA

SINGAPORE

SOUTH AFRICA

SPAIN

SWEDEN

SWITZERLAND

THAILAND

UKRAINE

USA

VIETNAM

INDEX

TUBE POLYURETHANE

ELASTOLLAN C98	A1.1
1190 EXTRAFLEX	A2.1
98 ANTISTATIC	A3.1
FABUTHANE 54	A3.1
SPARK RESISTANCE	A4.1

TUBE POLYAMIDE

RILSAN® PA 11	B1.1
NYLON PA 6	B2.1

TUBE POLYETHYLENE

LLDPE	C1.1
-------	------




See **Metal Work**
General Catalogue

TUBE POLYURETHANE ELASTOLLAN C98



PNEUMATIC HOSE

ELASTOLLAN C98

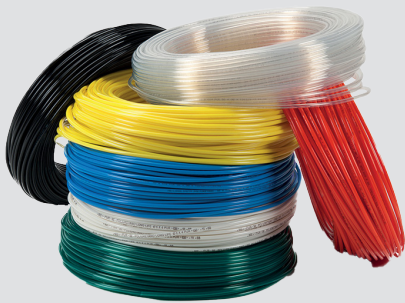

Flexible ester base polyurethane tube (hardness 52 Shore D). We have always decided to promote the Elastollan® brand, which ensures constant quality and superior thermal and mechanical stability. The BASF product wins the trust of those who have the way to measure their performance and longevity.

Operating temperature: from -40°C to 60°C

APPLICATIONS



INDUSTRIAL AUTOMATION



ROBOTICS



VACUUM EQUIPMENT




MACHINE TOOL




CABLE CARRIER CHAIN

TECHNICAL FEATURES AT GLANCE ELASTOLLAN C98

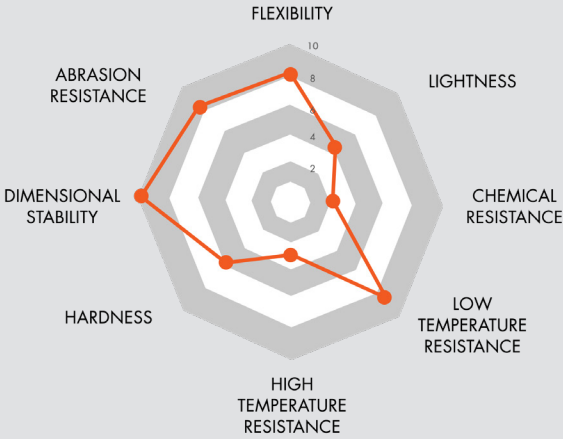

PRESSURE VALUES EXPRESSED AS A % IN RELATION TO TEMPERATURE FROM -40°C TO 60°C

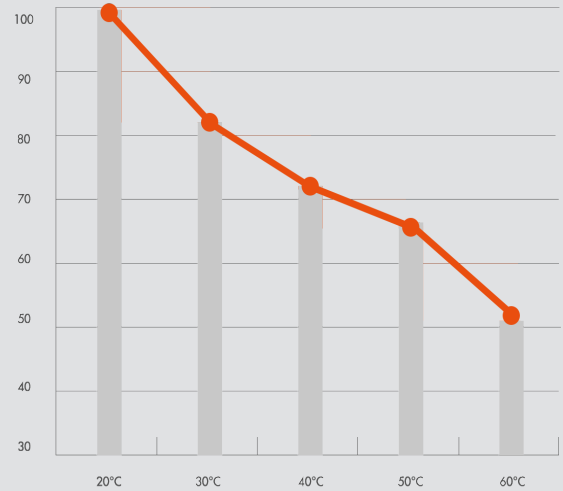

TECHNICAL DATA

General Proprieties			Typical Values
Density	G/cm3	DIN53479	1.18
Flexural modulus	N/mm3	DIN53457-T	160
Stress at yield	N/mm3	DIN53504-S2	50
Tensile strength at yield	N/mm3	DIN53504-S2	550
Tensile elongation at break	N/mm3	DIN53515	130
Strenght at break	mm3	DIN53516	30
Hardness	Shore A	DIN53505	98
Hardness	Shore D	DIN53505	52

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
90111122	Blue*	4	2	+/- 0.07	10	22
90111122-BL	Black					
90111122-O	Orange					
90111122-R	Red					
90111122-Y	Yellow					
90111122-G	Green					
90111132	Blue*	6	4	+/- 0.07	25	14
90111132-BL	Black					
90111132-O	Orange					
90111132-R	Red					
90111132-Y	Yellow					
90111132-G	Green					
90111142	Blue*	8	5.5	+/- 0.07	40	12
90111142-O	Orange					
90111142-R	Red					
90111142-Y	Yellow					
90111142-G	Green					
90111152	Blue*	10	7.5	+/- 0.07	60	9
90111152-BL	Black					
90111152-O	Orange					
90111152-R	Red					
90111152-Y	Yellow					
90111152-G	Green					
90111162	Blue*	12	9	+/- 0.07	70	9
90111162-BL	Black					
90111162-O	Orange					
90111162-R	Red					
90111162-Y	Yellow					
90111162-G	Green					
90111172	Blue*	14	11	+/- 0.07	100	8
90111172-BL	Black					
90111172-BL	Black					


Please contact our staff if you need a tube with box codes or if you have any other needs.

TUBE POLYURETHANE 1 190 EXTRAFLEX



PNEUMATIC HOSE

1 190 EXTRAFLEX

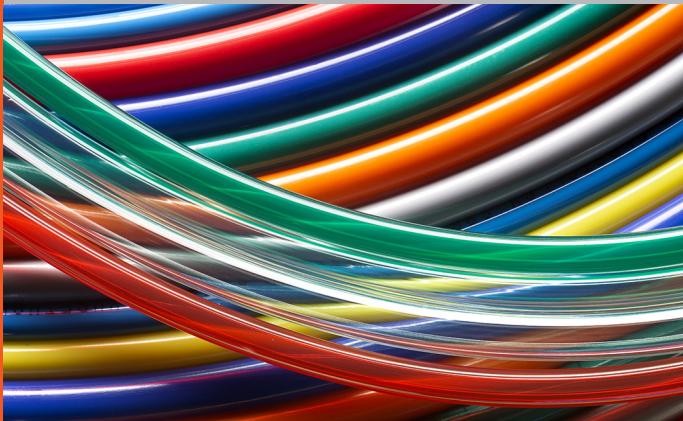

- Flexible ether-based polyurethane tube
- Hardness 45 Shore D

Operating temperature: from -40°C to 60°C

APPLICATIONS



INDUSTRIAL AUTOMATION



ROBOTICS



HYDROLYSIS RESISTANCE




MACHINE TOOL




CABLE CARRIER CHAIN

TECHNICAL FEATURES AT GLANCE 1 190 EXTRAFLEX

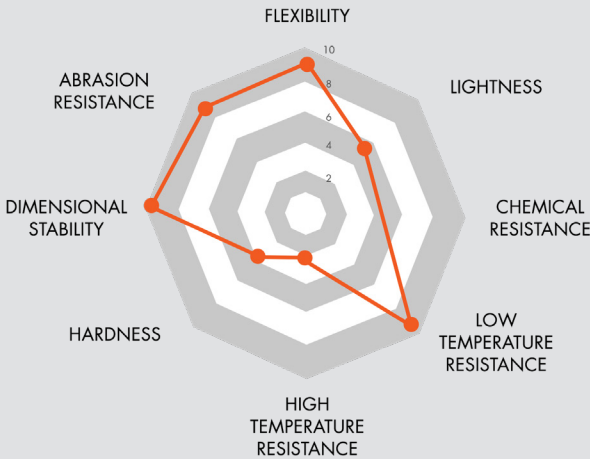

PRESSURE VALUES EXPRESSED AS A % IN RELATION TO TEMPERATURE FROM -40°C TO 60°C

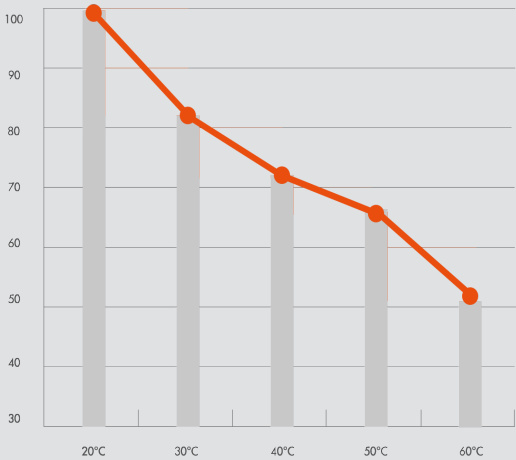

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
90111122-CRY	Crystal	4	2	+/- 0.07	10	17
90111132-CRY	Crystal	6	4	+/- 0.07	25	11
90111142-CRY	Crystal	8	5.5	+/- 0.07	40	9
90111152-CRY	Crystal	10	7	+/- 0.07	50	9
90111163-CRY	Crystal	12	8	+/- 0.07	50	10
90111162-CRY	Crystal	12	9	+/- 0.07	70	7
90111172-CRY	Crystal	14	10	+/- 0.07	70	8

TUBE POLYURETHANE 98 ANTISTATIC

MB
MEBRA

DISTRIBUTED BY
METAL[®]WORK
P N E U M A T I C

98 ANTISTATIC



Flexible triple-layer base polyurethane tube, for low pressure, stabilized in light, 98 ShA. Its multi-layer structure consists of an inner and outer layer of dissipative (antistatic) polyurethane having surface electrical resistivity $\leq 10^6$ Ohm according to ISO 8031:2009(E) and an intermediate layer of polyurethane that gives the product high mechanics. Suitable for use in ATEX environment, group 2, 2/3 G&D category, installation zones 1, 2.

Operating temperature: from -40°C to 60°C

APPLICATIONS



INDUSTRIAL AUTOMATION



ROBOTICS



MACHINE TOOL



VACUUM EQUIPMENT



CABLE CARRIER CHAIN



ATEX



POWDERED PAINT



ELECTRICAL RESISTANCE

Code.	Color	Dimensions (mm)		Tolerances	Bending radius	Pressure at 23 C
98LA 2.5x4	Black	4	2.5	+/- 0.07	15	15
98LA 4x6	Black	6	4	+/- 0.07	25	14
98LA 5.5x8	Black	8	5.5	+/- 0.07	40	12
98LA 6.5x10	Black	10	6.5	+/- 0.07	40	14
98LA 8x12	Black	12	8	+/- 0.07	50	13

NOTE Special tube subjected to availability or minimum order quantity.

TUBE POLYURETHANE FABUTHANE 54



PNEUMATIC HOSE

FABUTHANE 54



Flexible ether base polyurethane tube, stabilized in light and hardness 54 Shore D. Food grade acting on contact with solid and liquid foods. We produce it in a range of transparent colors that, in the case of liquids, allow to observe the passage of fluid.

Operating temperature: from -40°C to 60°C

APPLICATIONS



INDUSTRIAL AUTOMATION



HYDROLYSIS RESISTANCE



MACHINE TOOL



VACUUM EQUIPMENT



FOOD TRANSFER



ROBOTICS



DRINKING WATER

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
54FBU 2.5x4	Crystal	4	2.5	+/-0.07	15	12
54FBU 4x6	Crystal	6	4	+/-0.07	25	11
54FBU 5.5x8	Crystal	8	5.5	+/-0.07	40	9
54FBU 7.5x10	Crystal	10	7.5	+/-0.07	60	7
54FBU 9x12	Crystal	12	9	+/-0.07	70	7

NOTE Special tube subjected to availability or minimum order quantity.

TUBE POLYURETHANE SPARK RESISTANCE



DISTRIBUTED BY
METAL[®]WORK
P N E U M A T I C

SPARK RESISTANCE

Flexible UL94 V2 self-extinguishing ether based polyurethane tube. The high thicknesses of the items in this series ensure good protection in case of accidental and occasional contact with glowing sparks or welding slag.

Operating temperature: from -40°C to 60°C



APPLICATIONS



VACUUM EQUIPMENT



HYDROLYSIS RESISTANCE



MACHINE TOOL



SELF - EXTINGUISHING RATE



WELDING MACHINE



ROBOTICS

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
MS-TPU 2x4	Black	4	2	+/-0.07	10	22
MS-TPU 3.5x6	Black	6	3.5	+/-0.07	15	17
MS-TPU 5.5x8	Black	8	5.5	+/-0.07	30	12
MS-TPU 7.5x10	Crystal	10	7.5	+/-0.07	45	10
MS-TPU 8x12	Crystal	12	8	+/-0.07	40	13

NOTE Special tube other colors subjected to availability or minimum order quantity.

TUBE POLYAMIDE

RILSAN® PA 11



RILSAN® PA 11

Tubes RILSAN® PA 11 flexible linear PHL of plant origin are the preferred solution of those looking for the best among polyamides, with an eye to nature. The excellent mechanical, chemical properties and the resistance to cold impacts allow its use in numerous industrial and automotive applications. The tubes in this series are produced with bio-polyamide 11 produced from renewable sources, derived from the flexible, plasticized lead oil, stabilized in light and heat. The raw material is designed to meet DIN 73378 / 74324 regulations.


Operating temperature: from -40°C to 80°C




TECHNICAL DATA

	General Proprieties		Typical Values
Density	G/cm ³	ISO R 1183 D	1.05
Melting point	°C	ASTM D 789	178-184
Absorbption at equilibrium		P921LCF002	
At 23 °C & 50% HR	%		0.8
At 23 °C in water	%		1.6
Flexural modulus	Mpa	ISO 178	350
Carpy impact		ISO 179/IeU	
At + 23 °C unnotched	Kj/m ³		NC
At -30 °C unnotched	"		NC
At + 23 °C notched	"	ISO 179/IeA	NC
At - 30 °C notched	"		8.9
Tensile			
Stress at yield	Mpa	ISO R 527	27
Elongation at yield	%		32
Strenght at break	Mpa		48
Elongation at break	%		300
Heat distortion temperature under load of		ISO 75	
Under 0.46 mpa	°C		130
Under 1.85 mpa	°C		45
Flame resistance		ASTM D 635	burns at 9 mm./min
Hardness	Shore D	ISO 868	63

PRESSURE VALUES EXPRESSED AS A % IN RELATION
TO TEMPERATURE FROM -40°C TO 80°C

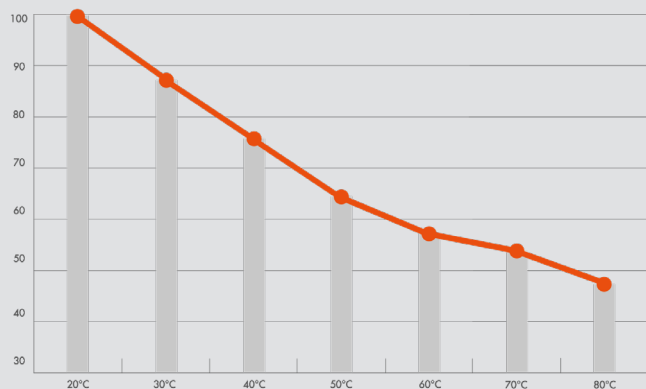

TECHNICAL FEATURES AT GLANCE
RILSAN 11

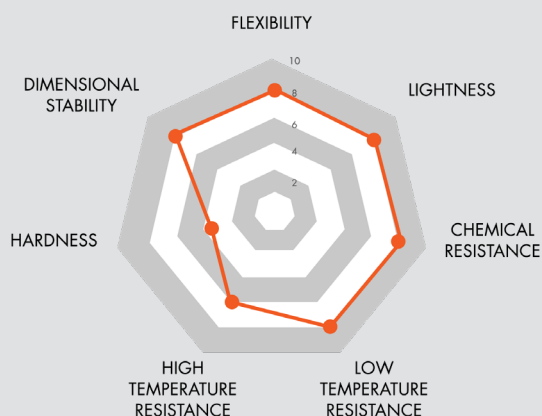

APPLICATIONS



INDUSTRIAL AUTOMATION



VACUUM EQUIPMENT



MACHINE TOOL



BREAKING SYSTEMS
TRUCK TRAILERS



BREAKING SYSTEMS
TRUCK TRAILERS



PEST CONTROL LINES



PETROLEUM BASED
CHEMICAL TRANSFER



CHEMICAL RESISTANCE

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
N1100400	Black*	4	2	+/-0.07	15	44
N1100400-W	White*					
N1100400-DB	Dark Blue					
N1100400-B	Light Blue					
N1100400-O	Orange					
N1100400-R	Red					
N1100400-Y	Yellow					
N1100400-G	Green					
N1100600	Black*	6	4	+/-0.07	30	26
N1100600-W	White*					

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
N1100600-DB	Dark Blue					
N1100600-B	Light Blue					
N1100600-O	Orange					
N1100600-R	Red					
N1100600-Y	Yellow					
N1100600-G	Green					
N1100800	Black*	8	6	+/-0.07	50	19
N1100800-W	White*					
N1100800-DB	Dark Blue					
N1100800-B	Light Blue					
N1100800-O	Orange					
N1100800-R	Red					
N1100800-Y	Yellow					
N1100800-G	Green					
N1101000	Black*	10	8	+/-0.07	80	14
N1101000-W	White*					
N1101000-DB	Dark Blue					
N1101000-B	Light Blue					
N1101000-O	Orange					
N1101000-R	Red					
N1101000-Y	Yellow					
N1101000-G	Green					
N1101200	Black*	12	10	+/-0.07	115	12
N1101200-W	White*					
N1101200-DB	Dark Blue					
N1101200-B	Light Blue					
N1101200-O	Orange					
N1101200-R	Red					
N1101200-Y	Yellow					
N1101200-G	Green					
N1101400	Black*	14	12	+/-0.07	155	10
N1101400-W	White*					
N1101400-DB	Dark Blue					
N1101400-B	Light Blue					
N1101400-O	Orange					

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
N1101400-R	Red					
N1101400-Y	Yellow					
N1101400-G	Green					
N1101070	Black	10	7	+/-0.07	50	23
N1101070-W	White					
N1101075	Black	10	7.5	+/-0.07	60	19
N1101075-W	White					
N1101290	Black	12	9	+/-0.07	75	19
N1101290-W	White					
N1101290-R	Red					

TUBE POLYAMIDE NYLON PA 6



NYLON PA 6

Rigid linear tube in non-plasticized PA 6. Due to its hygroscopicity that makes it dimensionally unsealed, its use in controlled environments is recommended. If the conditions in which it is installed allow its use, the PA 6 offers the best value for money among polyamides.


Operating temperature: from -10°C to 80°C




TECHNICAL DATA

	General Proprieties		Typical Values
Density		ASTM D 792	1.13
Melting point	°C	ASTM D 789	220
Water absorbtion	%	ASTM D 570	9 10
Thermal expansion		ASTM D 696	7 10
Specific heat	J/(g-K)	ASTM D 696	1.7
Thermal conductivity	W/(m-K)	DIN 52612	0.23
Working temperature without stress	°C	ISO 75	70/85
Maximum working temperature for short terms	°C	ISO 75	180
Flamability		ASTM D 635 UL 94	V2
Tensile modulus of elasticity	Mpa	DIN 53457 ISO R 527	3000/1000
Tensile yield strength	Mpa	DIN 53455 ISO R/527	90/45
Tension at strenght	%	DIN 53455 ISO R/528	4.5/20
Dielectric hardness	Kv/mm	DIN 53481 ISO 303	100/60
Dielectric costant		ISO 303/4	3.5/7
Disspation factor		ISO 303/4	0.023/0.3
Hardness	Shore D	ISO 868	85

PRESSURE VALUES EXPRESSED AS A % IN RELATION
TO TEMPERATURE FROM -10°C TO 80°C

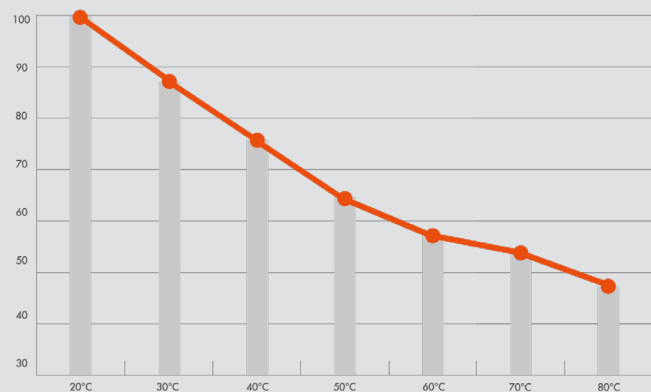

TECHNICAL FEATURES AT GLANCE
NYLON PA6

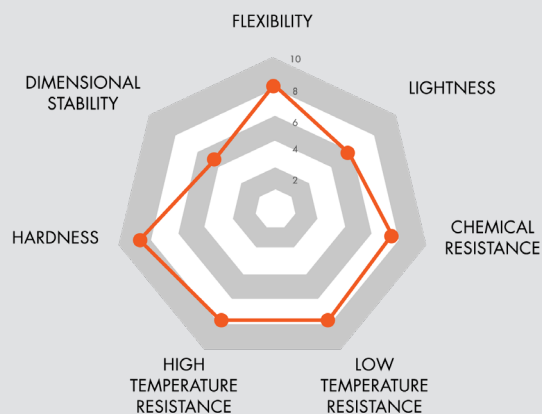

APPLICATIONS



MACHINE TOOL



VACUUM EQUIPMENT



MACHINE TOOL

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
N6000200	White*	2	1	+/-0.07	10	55
N6000400	Black*	4	2	+/-0.07	15	55
N6000400-W	White					
N6000600	Black*	6	4	+/-0.07	40	33
N6000600-B	Blue					
N6000600-DB	Dark Blue					
N6000600-W	White					
N6000600-Y	Yellow					
N6000800	Black*	8	6	+/-0.07	70	23
N6000800-B	Blue					
N6000800-R	Red					
N6000800-W	White					
N6000800-Y	Yellow					
N6001000	Black*	10	8	+/-0.07	115	18
N6001000-W	White					
N6001200	Black*	12	10	+/-0.07	165	15
N6001200-B	Blue					
N6001200-W	White					

Please contact our staff if you need a tube with box codes or if you have any other needs.

TUBE POLYETHYLENE LLDPE



LLDPE




Low Density Linear Polyethylene Tube (LLDPE), food grade, semiflexible stabilized in light. Polyethylene offers at a modest price a tube with good chemical resistance. When compared to low density polyethylene, LLDPE boasts improved tensile, impact and perforation resistance as well as improved thermal stability and stress cracking resistance. It is also tasteless and


TECHNICAL DATA

	General Proprieties		Typical Values
Density	G/cm ³	ASTM 1505 D	0.922
Melting point	°C	metodo interno	113
Crushing temperature	°C	ASTM 746 D	-75
Softening temperature		ASTM 1525 D	96
Tensile yield Strength	Mpa	ASTM 882 B	10~10
Tensile at break	Mpa	ASTM 882 B	25~22
Tension at strenght	%	ASTM 882 B	380~580
Secant module 1%	Mpa	ASTM 882 B	170~190
Abrasion resistance	N/mm	ASTM 1922 D	40~53
Strength at break	g	ASTM 1709 D	260
Dynamic coefficient of rub		ASTM 1894 D	>0.5
Hardness	Shore D	ASTM 2240	46

PRESSURE VALUES EXPRESSED AS A % IN RELATION
TO TEMPERATURE FROM -20°C TO 70°C

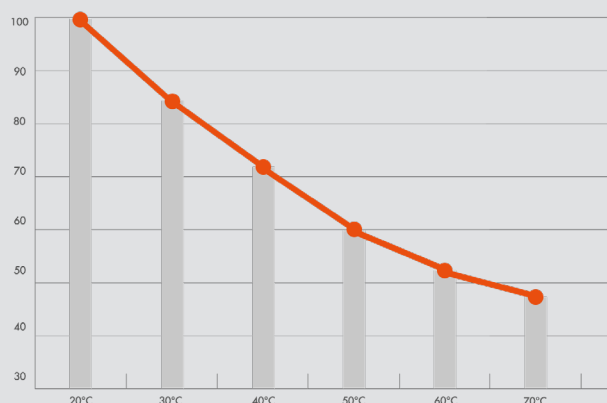

TECHNICAL FEATURES AT GLANCE
LLDPE

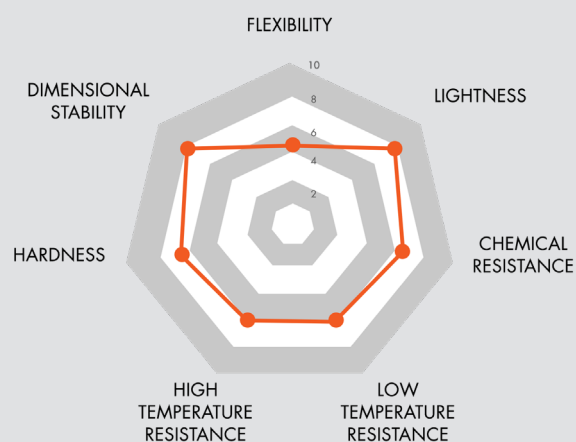

APPLICATIONS



INDUSTRIAL AUTOMATION



CHEMICAL RESISTANCE



MACHINE TOOL



VACUUM EQUIPMENT



FOOD TRANSFER

Code.	Color	Dimensions (mm)		Tolerances (mm)	Bending radius (mm)	Pressure at 23 C working
		OD	ID			
TPLLD2X4	White	4	2	+/-0.07	15	30
TPLLD2X4-B	Blue					
TPLLD4X6	White	6	4	+/-0.07	30	18
TPLLD4X6-B	Blue					
TPLLD4X6-BL	Black					
TPLLD5X8	White	8	5	+/-0.07	35	20
TPLLD6X8	White	8	6	+/-0.07	60	12
TPLLD6X8-B	Blue					
TPLLD8X10	White	10	8	+/-0.07	90	10
TPLLD9X12	White	12	9	+/-0.07	85	12
TPLLD9X12-B	Blue					

Please contact our staff if you need a tube with box codes or if you have any other needs.

NOTE Example for purchase order code with box.

1. 901111321	PU Tube 6x4 mm (Blue)	100 m/box
2. 901111321-BL	PU Tube 6x4 mm (Black)	100 m/box
3. 901111322	PU Tube 6x4 mm (Blue)	50 m/box
4. 901111322-BL	PU Tube 6x4 mm (Black)	50 m/box

Metal Work Pneumatic (Thailand) Co.,Ltd (Head Office)

55/289 Moo.3, 345 Road, Lumpo, Bangbuathong, Nonthaburi 11110

Tel. +66 2-961-7000 - Fax. +66 2-961-7227

metalwork@metalwork.co.th sale@metalwork.co.th

Line. @metalworkthailand

Metal Work Showroom EEC: Thaiwasadu South Pattaya

80/3 Moo 12 Sukhumvit Rd, Nong Prue, Bang Lamung, Chonburi 20150

Tel: 092-925-2516 sale.eec@metalwork.co.th



metalwork.co.th